

# Innovative Field Receiver Based on a New Type of Active Rod Antenna

Alessandro Gandolfo  
Research & Development  
Narda Safety Test Solution  
Cisano sul Neva (SV), Italy  
[alessandro.gandolfo@l-3com.com](mailto:alessandro.gandolfo@l-3com.com)

Renzo Azaro  
EMC S.r.l.  
Genova, Italy  
[azaro@emclab.it](mailto:azaro@emclab.it)

Domenico Festa  
IBD International Business Development  
Chiari (BS), Italy  
[d.festa@ibdonline.it](mailto:d.festa@ibdonline.it)

**Abstract**—An innovative approach to improve classical Rod Antennas is here described. This kind of antenna is used in EMC application since many years, but they have intrinsic design limitation and little improvement has been introduced to the design of the antenna in the past decades. Most of the limitation of a classical Rod Antenna can be overcome, thanks to a combination of technical solutions that can transform a rod antenna into a field receiver, yet maintaining the physical dimensions as required by civilian and military standards. An automatic preselector can also be added, as well as a preamplifier and attenuator banks. Moreover, a more convenient fiber optic output can be added as well, to avoid cable couplings and grounding effects.

**Keywords**—rod antenna; field receiver; grounding effects

## I. INTRODUCTION

Since many years rod antennas are used to measure vertically polarized electric field in frequency ranges between 10 kHz (or even less) and 30MHz (and more). These devices are widely used in EMC to measure the radiated emissions of equipment under test, for antennas calibration purposes, for site calibrations and shielding efficiency evaluation, in electromagnetic safety investigation to measure field levels, etc.

Working from VLF to HF, with wavelength from tens of kilometres to tens of meters, a rod antenna can operate in both near and far field regions with highly variable wave impedance. Due to the limited length of the monopole, this impedance is higher than the one typically shown from the other kind of usual antennas, even at the high end frequency of 30 MHz. At lower frequencies the impedance of a classical rod antenna becomes extremely high, being its equivalent model a small capacitor in the order of 10 pF.

Considering an antenna as a transformer operating to match field wave impedances and receiver impedance, the need to manage extremely variable impedance values results in a wide variation of the antenna factor, which could rise up to 100 dB, with the consequence of very high noise floor of the measuring system.

The compromise adopted so far to overcome the above limitation is to connect the rod directly to a high input impedance of an amplifier, realising in this way a tool that is no longer an antenna, rather it is a voltage probe.

With the amplifier, the antenna factor is maintained roughly constant over the operating frequency band, with a sensitivity that anyway remains limited by the noise figure of the amplifier, and with some distortion effects, as typical in active broadband devices.

However, the dynamic range is limited and, moreover, since high impedance input stages of these kind of amplifier are sensitive FET gates, damages are possible and frequent system verification to check they are still operating correctly becomes mandatory.

Due to the above limitations (for more details see next clause), the use of rod antennas is critical in some applications, but on the other hand there are conditions where the electric field E shall be measured (especially in near field conditions), therefore a solution is required.

## II. LIMITATIONS OF CLASSICAL ROD ANTENNAS

In the following table a summary of the major limitations usually exhibited by classical rod antennas.

TABLE I. MAJOR LIMITATION OF A CLASSICAL ROD ANTENNA

Limit	Reason	Remarks
Weakness to transients and high signals	FET based high impedance input stage can be easily damaged	Need of frequent verification, temporarily replacing the rod with a matching network to an external generator to verify the antenna.
No attenuation	Rod antennas do not have automatic variable attenuators	Some antennas accept dedicated manual attenuator at the bottom of the rod.
No gain control	Rod antennas do not have gain control	Some antennas have a switch to manually increase/decrease the gain of the built-in preamplifier.
Easy saturation	Broadband active input stage with no automatic control	Some antennas may have an LED to alert that saturation occurs.
Limited sensitivity	High noise figure of the active stage input stage	High noise floor cannot be eliminated.
Limited dynamic range	Combination of high noise floor and saturation effects	Without automatic attenuator and preamplifier control the dynamic range cannot be increased.
Antenna Factor variation	Self capacitance changes caused by grounding variations	The self capacitance is mathematically defined and it is function of the grounding. The AF is function of the self capacitance.
Resonances of the complete system due to the coaxial cable	The presence of the coaxial cable causes resonances that may result in large deviations from the ideal capacitive behavior of the rod antenna	The effects related to the cable have to be minimized, but they always remain highly unpredictable.
Additional measurement uncertainty	The presence of the coaxial cable causes coupling and grounding variations, and also wave scattering	The effects related to the cable have to be minimized, but they always remain highly unpredictable.

### III. INNOVATIVE FIELD RECEIVER BASED ON A NEW TYPE OF ACTIVE ROD ANTENNA

The basic idea is to combine a traditional rod antenna with some circuitries that are typically available only in receivers, to make a rather complex instrument that maintains the basic characteristics of a rod antenna but can be used in many other

different applications, as most of the limitations of the classical rod antenna could be eliminated.

The high complexity of the new unit, as it is conceived so far, can be realized at a glance looking at the following indicative block diagram.

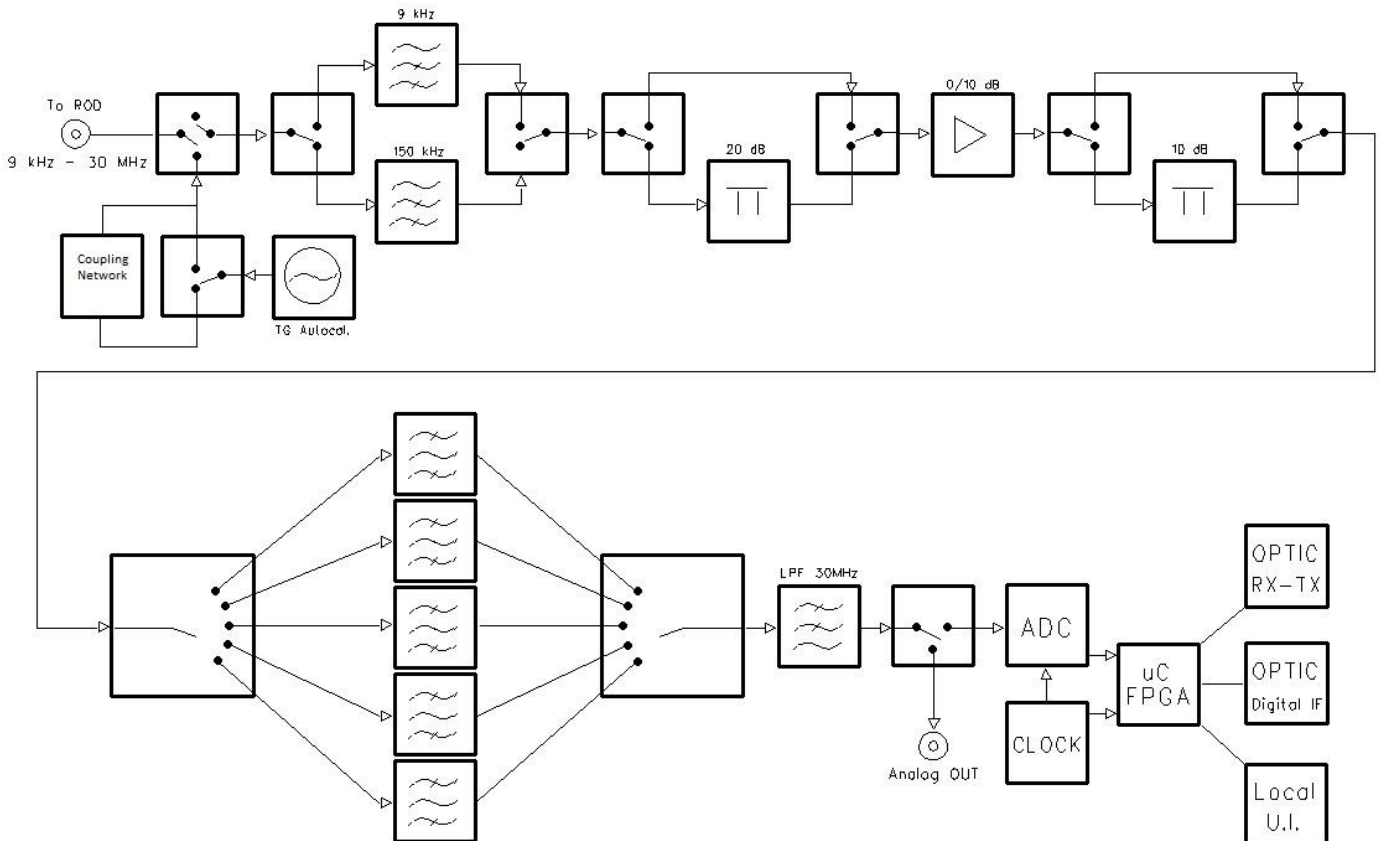


Fig. 1. Block diagram of the Innovative Field Receiver Based on a New Type of Rod Antenna (5 bandpass filters)

To minimize the effects of out of band low frequency disturbances, the input from the rod is first processed through two high impedance high-pass filters that can be chosen to set the lower end at 9 kHz or 150 kHz, depending the need and the standard in use. The signal is then attenuated up to 20 dB, amplified up to 10 dB and attenuated again up to 10 dB, to provide best possible performances in term of saturation level, sensitivity and dynamic range.

After that the signal is preselected with five or six band-pass filters; the following table shows the 6 filters frequency division:

9 kHz	to	150 kHz
150 kHz	to	5,67 MHz
5,67 MHz	to	11,19 MHz
11,19 MHz	to	16,71 MHz
16,71 MHz	to	22,23 MHz
22,23 MHz	to	30 MHz

With this configuration, for a single CW tone the saturation level can be very high (as high as 1000 V/m according to a design model), and even in case of broadband signals the filters and the preselector can dramatically reduce the occurrence of saturation.

The sensitivity that the proposed solution can achieve is outstanding (according the same design model, at least -22 dB $\mu$ V/m @ 1 MHz and 200 Hz RBW, or even better), while the dynamic range could span from 140 dB to 175 dB, depending the available attenuation.

TABLE II. HOW THE NEW TYPE OF ROD ANTENNA IMPROVES THE BEHAVIOUR OF A CLASSICAL ROD ANTENNA

Limit	Reason	Remarks
Weakness to transients and high signals	FET based high impedance input stage can be easily damaged	Automatic self-verification made with built-in Tracking Generator in negligible time.
No attenuation	Rod antennas do not have automatic variable attenuators	Automatic attenuation available.
No gain control	Rod antennas do not have gain control	Automatic gain control available.
Easy saturation	Broadband active input stage with no automatic control	Internal preselector available, that together with automatic control of attenuation and gain, make saturation very unlikely.
Limited sensitivity	High noise figure of the active stage input stage	The internal preselector, together with automatic control of attenuation and gain, allow lowering the attenuation and increasing sensitivity.
Limited dynamic range	Combination of high noise floor and saturation effects	The internal preselector, together with automatic control of attenuation and gain, allow increasing dynamic range.
Antenna Factor variation	Self capacitance changes caused by grounding variations	The RF cable replaced by a Fiber Optic link makes the grounding of the counterpoise much more repeatable.
Resonances of the complete system due to the coaxial cable	The presence of the coaxial cable causes resonances that may result in large deviations from the ideal capacitive behavior of the rod antenna	The RF cable replaced by a Fiber Optic link completely eliminates the effects due to the cable.
Additional measurement uncertainty	The presence of the coaxial cable causes coupling and grounding variations, and also wave scattering	The RF cable replaced by a Fiber Optic link completely eliminates the effects due to the cable.

#### V. PROTOTYPING

To make such a new receiving system could be difficult and all over the realization of the project showstoppers may arise. For this reason the selected approach is somehow “modular”, following the path of elementary blocks

A revolutionary feature of this innovative Field Receiver is the availability of an internal tracking generator that allows automatic functional verification without any calibration kit. The generator can be connected directly to the antenna or to the receiving unit, or it can be connected to both thanks to a coupling network, so it permits to evaluate the Antenna Factor, to assess the self-capacitance of the antenna and to feed the unit with a known signal, also with immediate feedback on the quality of the grounding and on the repeatability of the set-up.

Although the Field Receiver keeps an output via traditional coaxial cable – a legacy to old measuring solutions - the preferred output is on a Fiber Optic link that, thanks to a dedicated protocol, allows a common serial communication via USB port to a PC (optical-to-USB converter) or to new technology receivers with FO link input.

As this Field Receiver could also act as a traditional rod antenna, the operating frequency range could be 9 kHz to 30 MHz (easily extendable), while the mechanical length of the rod is 100 cm (CISPR 25), that with a removable extension can be increased up to 104 cm (MIL-STD 461). The ground counterpoise will be 60 cm times 60 cm, as required by the standards.

A replaceable Li-Ion battery pack makes easy to operated outdoor and in particular test conditions.

#### IV. ADVANTAGES OF INNOVATIVE FIELD RECEIVER BASED ON A NEW TYPE OF ROD ANTENNA

The previous table 1 is now updated with the advantages given by the proposed new solution:

prototyping first, with a subsequent phase of assembly and tuning of all the modules.

With this concept in mind, the filters have been designed and optimized, both the high-pass input filters and the bandpass filters. Experimental results, combined with

manufacturing needs, supported the selection of six bandpass filters, that is more convenient in terms of performances, costs and easy manufacturing and calibration.

Military grade switches and attenuators are the right solution for the input section, as performances and reliability are guaranteed in all operating conditions for thousand and thousand of cycles.

A similar switch is also used to connect the antenna to the internal tracking generator, with or without the coupling network: another “brick” of the system capable of delivering enough signal over the entire frequency range of 9 kHz to 30 MHz.

The digital section after the analogue output has been easily tested, and the fiber optic link was chosen among those featuring the highest mechanical resistance (for outdoor operation) at a reasonable price.

The mechanical assembly was not difficult to realize, yet the best compromise in terms of ruggedized construction and flexibility of use took some time to be found.

A receiving system like the one proposed needs a powerful software to supervise all the functions, in particular those related to the use of the internal signal generator to make the “auto-calibration”, to evaluate the Antenna Factor and to assess the self-capacitance of the antenna. Options like remote control of the antenna and a feedback on the quality of the grounding are still under evaluation. This software has been

widely tested and is now ready for being implemented on the prototype unit.

## VI. CONCLUSIONS

This innovative field receiver is very promising and represents a dramatic step forward compared to traditional rod antennas. The fully comprehensive tests of the prototypes have been already at an advance stage, and so far all the expected performances and characteristics were met. However, improvements and adjustments on the hardware and on the software are still in progress.

Final tests results are expected soon and will be reported.


## ***Acknowledgment***

The Authors acknowledge Narda Safety Test Solution Srl Italy for having made possible the preparation of this paper and its presentation to the symposium.




# FR4003

Field Receiver

PRELIMINARY



Start auto calibration					
Receiver (ADC)			Front End (BNC)		
Frequency (MHz)	Att.0 Voltmeter high Z (dB)	Att.0 Antenna (dB)	Att.10 Voltmeter high Z (dB)	Att.10 Antenna (dB)	Att.10 Antenna (dB)
1	0.009	2.68	-6.52	2.90	-6.52
2	0.01	2.70	-6.31	2.92	-6.31
3	0.02	2.69	-5.57	2.90	-5.57
4	0.05	2.69	-5.33	2.89	-5.33
5	0.08	2.71	-5.27	2.92	-5.27
6	0.1	2.71	-5.25	2.92	-5.25
7	0.15	2.72	-5.24	2.92	-5.24
8	0.2	2.70	-5.24	2.91	-5.24
9	0.5	2.70	-5.22	2.89	-5.22
10	0.8	2.69	-5.20	2.87	-5.20

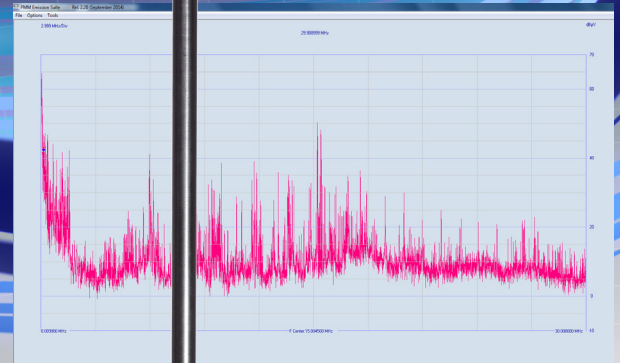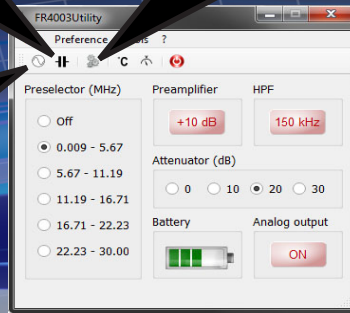

## Main Features

- 9 kHz to 30 MHz frequency range
- Antenna CISPR 12, CISPR 16, CISPR 25, MIL-STD, DO-160 fully compliant
- Internal full CISPR 16-1-1 receiver
- Embedded Attenuator, Preamplifier and Preselectors
- Fiber optic serial link to 9010 series or directly to PC
- Grounding Effectiveness Auto-Diagnostic Capability
- On board tracking generator and antenna CISPR adapter
- Automatic diagnostic and calibration
- Scattering free
- PC softwares
- RF Front-End Output
- On board capacitance meter
- Replaceable Li-Ion battery



The FR4003 is a new reference in measuring electric fields up to 30 MHz. Thanks to its innovative approach it replaces traditional rod antennas adding several benefits. It fully meets all MIL-STD and CISPR specifications of the rod antenna and it is a real full compliant CISPR 16-1-1 receiver with the capability of working, via fiber optic link, either stand alone when connected to a PC or connected to a PMM receiver. Nonetheless, it can maintain full legacy with any standard receiver, because it also has the traditional coaxial cable output. However, this way is not recommended as the cable has a significant influence, such as scattering, which is one of the major drawbacks of rod antennas. The internal receiver structure features preselectors, attenuators and preamplifiers fully controlled either by the internal firmware or manually by the operator. Hence, a test set-up does not need any additional receiver. Moreover, an internal tracking generator allows performing a self-calibration procedure which always guarantees optimum performances, ensuring the accuracy of measurements. The same internal tracking generator is part of an internal capacitance meter that becomes essential not only for the self-calibration, but also for verifying the grounding effectiveness of the antenna. Last but not least, the FR4003 can become a field generator. In this case the antenna broadcasts the signal made by the internal signal generator and can thus be used to characterize environments or other receiving set-ups.

In addition to the standard PEMS software, the FR4003 comes also with a controlling software, which can be used when connected to a standard receiver. Thanks to its replaceable Li-Ion battery, the FR4003 can work for several hours with no connection having thus unperturbed field.




# FR4003

## Field Receiver

### SPECIFICATIONS

<b>Frequency range</b>	9 kHz to 30 MHz			
<b>Resolution</b>	1 Hz			
<b>Frequency accuracy</b>	< 1 ppm			
<b>RF Input</b>	High impedance N fem.			
<b>Attenuator</b>	Built-in 0 dB to 30 dB (10 dB steps)			
<b>HPF</b>	Built-in 9 kHz or 150 kHz HPF (selectable)			
<b>Preamplifier gain</b>	Built-in 10 dB gain (selectable)			
<b>Max input level</b>	BNC analog output saturation (1 dB compression point @ 1MHz) (SD Spectral Density with HPF 9 kHz)		Internal process (SD with HPF 9 kHz and Preselector ON)	
Preamp OFF, Att 20/30 dB	<b>100/104 cm rod</b>	<b>N input</b>	<b>100/104 cm rod</b>	<b>N input</b>
	380 V/m CW 137 dBµV/m/MHz SD		12 V/m CW 128 dBµV/m/MHz SD	
Preamp OFF, Att 0/10 dB	38 V/m CW 117 dBµV/m/MHz SD	137 dBµV CW 103 dBµV/MHz SD	1,2 V/m CW 98 dBµV/m/MHz SD	107 dBµV CW 84 dBµV/MHz SD
	14 V/m CW 108 dBµV/m/MHz SD	129 dBµV CW 94 dBµV/MHz SD	0,35 V/m CW 88 dBµV/m/MHz SD	97 dBµV CW 74 dBµV/MHz SD
Preamp ON, Att 0/10 dB				
<b>Damage level</b>	500 V/m CW			
<b>Noise level</b>	<b>100/104 cm rod</b>	<b>N input (50 Ω term)</b>		
Preamp ON, Att 0 dB, 1 kHz RBW	-5 dBµV/m	-13,5 dBµV		
<b>Spurious response</b>	< -5 dBµV; < 10 dBµV over 150 kHz (Att 0 dB, 50 Ω term, AVG, Ht 10 ms, RBW auto)			
<b>Measurement accuracy</b>	9 kHz to 30 MHz ± 0,8 dB			
<b>Preselector</b>	Two highpass filters:	9 kHz	150 kHz	
	Five bandpass filters:	9 kHz to 5,67 MHz 11,19 MHz to 16,71 MHz 22,23 MHz to 30 MHz	5,67 MHz to 11,19 MHz 16,71 MHz to 22,23 MHz	
<b>Internal receiver</b>	Fully digital Fast Fourier Transform based. Operates both in conjunction with 9010F and in stand alone			
<b>IF bandwidth</b>	3, 10, 30, 100, 300 kHz			
6 dB bandwidth	200 Hz, 9 kHz ( CISPR 16-1-1) 10, 100 Hz and 1, 10 kHz (MIL-STD-461) (Option)			
<b>Level measuring time</b> (hold time)	CISPR 16-1-1 as default 0,2 ms to 120 s			
<b>Detectors</b>	Peak, Quasi-Peak, Average, RMS, RMS-Average (Optional), C-Average Smart Detector function			
<b>Demodulation</b>	AM (In conjunction with PMM 9010)			
<b>Antenna Factor</b>	At BNC service analog output -10 dB/m (Att 0 dB PreAmp ON)			
<b>Analog output</b>	50 Ω BNC fem.			
<b>Internal generator</b>	Tracking & CW generator (for auto calibration, capacitance meter and field source)			
Frequency range	9 kHz to 30 MHz			
Frequency resolution	1 Hz			
Level range	65 to 95 dBµV			
Level resolution	1 dB			
Level accuracy	0,3 dB			
<b>Internal capacitance meter</b>	Range 0 to 100 pF Resolution 0,01 pF Calibration Automatic by external text fixtures			
<b>Auto test</b>	Automatic at power on			
<b>Auto calibration</b>	Through internal generator and matching network			
<b>Fiber optic connection</b>	RP-02 series serial optical interface 115 Kbaud 9010/9010F series high speed optical interface			
<b>PC softwares</b>	PMM Emission suite – PMM FR4003 Utility			
<b>Display units</b> with PMM Emission Suite SW	dBm, dBµV, dBµA, dBpW, dBµV/m, dBµA/m, dBpT 80 to 200 dB selectable dynamic range			
<b>Standard conformity</b>	CISPR 16-1-1, MIL-STD 461F full compliant on board receiver CISPR 12, CISPR 25, MIL-STD 461F, DO-160 full compliant rod antenna			
<b>FW updating</b>	Through the optical link by USB or RS232			
<b>Operating temperature</b>	-10° to 60°C			
<b>Power Supply</b>	7,4 V - 6,9 Ah Li-Ion rechargeable & interchangeable battery (8h operations, typical)			
<b>Tripod support</b>	Threaded insert UNC ¼"			
<b>Dimensions and weights</b> (Overall W x D x H)	Receiver 134 x 285 x 84 mm 2,40 kg Counterpoise 600 x 600 x 2 mm 4,15 kg Rod (1000 mm) Ø 29 x 1020 mm 0,50 kg Rod extension (40 mm) Ø 20 x 47 mm 0,05 kg TOTAL (w rod ext.) 600 x 600 x 1122 mm 4,85 kg			

# PRELIMINARY

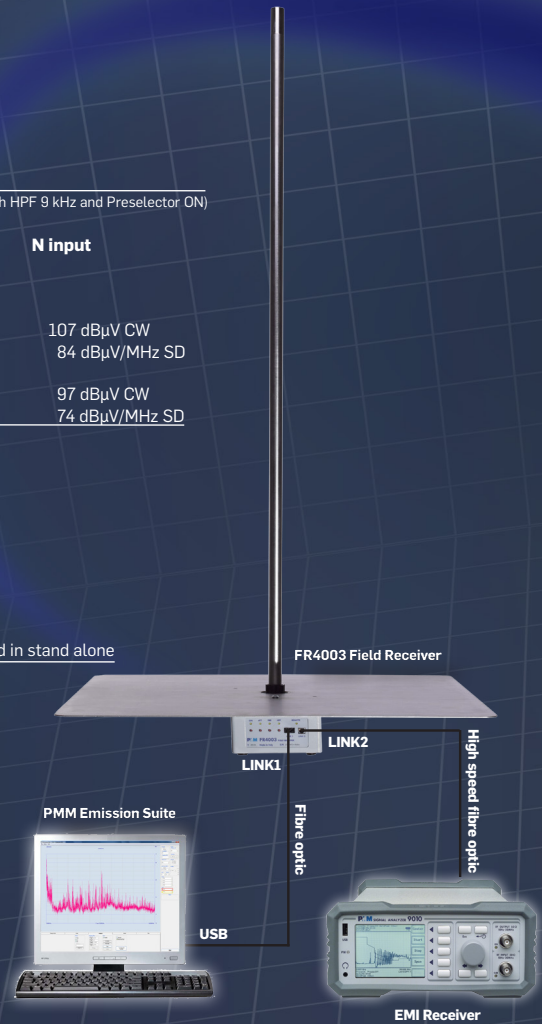

## Ordering Information:

**FR4003 Field Receiver**  
Include: 50 ohm to rod capacitance fixture for CISPR calibration; 15 pF fixture for capacitance meter calibration; MILSTD 40 mm rod extension; 600x600 mm counterpoise, battery pack; AC adapter/charger; PC softwares; 20 m high speed fiber optic for 9010F; 10 m plastic fibre optic for PC; USB-fiber optic adapter; certificate of calibration; operating manual.

## Optional accessories:

Li-ion Battery Pack BP-01  
High speed Fiber optic cable 9010/FO-20 (length: 20m)  
High speed Fiber optic cable 9010/FO-50 (length: 50m)  
High speed Fiber optic cable 9010/FO-100 (length: 100m)  
10 m plastic fiber optic for PC  
20 m plastic fiber optic for PC  
40 m plastic fiber optic for PC  
USB-fiber optic adapter  
TR-01 Wooden tripod extensible 60 - 180 cm

## Related Products

### Receivers

- 7010/00: EMI receiver 150 kHz to 1 GHz
- 7010/01: EMI receiver 9 kHz to 1 GHz
- 7010/02: EMI receiver 9 kHz to 30 MHz
- 7010/03: EMI receiver 9 kHz to 3 GHz
- 9010: EMI Receiver 10 Hz to 30 MHz
- 9010F: EMI Receiver 10 Hz to 30 MHz
- 9010/03P: EMI Receiver 10 Hz to 300 MHz
- 9010/30P: EMI Receiver 10 Hz to 3 GHz
- 9010/60P: EMI Receiver 10 Hz to 6 GHz
- 9030: EMI Receiver 30 MHz to 3 GHz
- 9060: EMI Receiver 30 MHz to 6 GHz
- 9180: EMI Receiver 6 GHz to 18 GHz
- 9010/Click4E: Four Channels Click Meter

### Antennas

- BC-01: Biconical Antenna 30 to 200 MHz
- LP-02: Log Periodic Antenna 200 MHz to 3 GHz
- LP-03: Log Periodic Antenna 800 MHz to 6 GHz
- VDH-01: Van der Hoofden test-head 20 kHz to 10 MHz
- TR-01: Antenna Tripod
- Antenna Set AS-02 (BC01+LP02+TR01)
- Antenna Set AS-03 (BC01+LP02+LP03+TR01)
- RA01: Rod Antenna 9 kHz to 30 MHz
- RA01-HV: Rod Antenna 150 kHz to 30 MHz
- RA01-MIL: Rod Antenna 9 kHz to 30 MHz

### LISN&Probes

- L2-16B: single phase AMN, 16 A
- L3-32: 4 lines, 3-phase AMN, 32 A
- L3-64: 4 lines, 3-phase AMN, 63 A
- L3-64/690V: 4 lines, 3-phase AMN, 63 A
- L3-100: 4 lines, 3-phase AMN, 100 A
- L1-150M: single-path, 50 Ohm AMN, 150 A
- L1-150M1: single-path, 50 Ohm AMN, 150 A
- L1-500: single phase AMN, 500 A
- L3-500: 4 lines, 3-phase AMN, 500 A
- L2-D: Delta LISN for telecom, 2 A, 150 Ω
- SBRF4: RF Switching Box
- SHC-1/1000: Voltage probe, 1000 Vac, 35 dB
- SHC-2/1000: Voltage probe, 1000 Vac, 30 dB



**Sales Office:**  
Via Leonardo da Vinci, 21/23  
20090 Segrate (Milano) - ITALY  
Phone: +39 02 2699871  
Fax: +39 02 26998700

E-Mail: [nardait.support@L-3com.com](mailto:nardait.support@L-3com.com)  
Internet: [www.narda-sts.it](http://www.narda-sts.it)

**Headquarter:**  
Via Benesse, 29/B  
17035 Cisanò sul Neva (SV) - ITALY  
Phone: +39 0182 58641  
Fax: +39 0182 586400